




# Rabbit Up user measurement guide

A simple guide to help you choose the correct size R82 Rabbit Up for your child

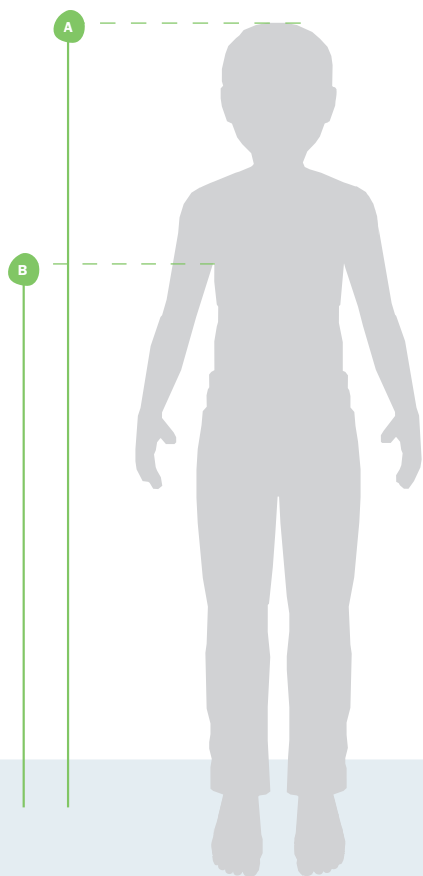

| Rabbit Up user measurements                   |               |                |                |                |
|---|---------------|----------------|----------------|----------------|
| Standard product (Stander and Mobile stander) | Size 1        | Size 2         | Size 3         | Size 4         |
| <b>A</b> Approximate total height             | 870 - 1000 mm | 1000 - 1390 mm | 1110 - 1490 mm | 1230 - 1800 mm |
| <b>B</b> Max. armpit height                   | 740 mm        | 1080 mm        | 1190 mm        | 1420 mm        |
| Max. weight                                   | 40 kg (88 lb) | 50 kg (110 lb) | 60 kg (132 lb) | 70 kg (154 lb) |
| Approximate age                               | 1 - 3         | 4 - 10         | 5 - 12         | 7 - 18         |


\*For the driving wheels, we recommend choosing the largest possible wheel size. See driving wheel measurement guide for details.



# Rabbit Up driving wheel measurement guide

| Size | Wheel size | Up-charge<br>Camber: +6° |     | Up-charge<br>Camber: +3° |     | Standard |     | Up-charge<br>Camber: -3° |     | Up-charge<br>Camber: -6° |     |
|------|------------|--------------------------|-----|--------------------------|-----|----------|-----|--------------------------|-----|--------------------------|-----|
|      |            | A                        | C   | A                        | C   | A        | C   | A                        | C   | A                        | C   |
| 1    | 22"        | N/A                      | N/A | N/A                      | N/A | 369      | 633 | 395                      | 610 | 423                      | 587 |
|      | 24"        | 299                      | 686 | 326                      | 659 | 356      | 635 | 384                      | 607 | 414                      | 582 |
|      | 26"        | 280                      | 691 | 310                      | 662 | 342      | 635 | 373                      | 604 | 406                      | 576 |
| 2    | 26"        | N/A                      | N/A | 394                      | 707 | 428      | 680 | 460                      | 651 | 493                      | 623 |
|      | 29"        | 337                      | 748 | 371                      | 713 | 409      | 682 | 444                      | 646 | 482                      | 614 |
|      | 32"        | 318                      | 754 | 355                      | 716 | 396      | 681 | 435                      | 642 | 476                      | 606 |
| 3    | 26"        | N/A                      | N/A | 444                      | 757 | 478      | 730 | 510                      | 701 | 543                      | 673 |
|      | 29"        | 387                      | 798 | 421                      | 763 | 459      | 732 | 494                      | 696 | 532                      | 664 |
|      | 32"        | 368                      | 804 | 405                      | 766 | 446      | 731 | 485                      | 792 | 526                      | 656 |
| 4    | 32"        | 406                      | 793 | 445                      | 755 | 486      | 719 | 525                      | 681 | N/A                      | N/A |
|      | 36"        | 384                      | 802 | 427                      | 759 | 473      | 719 | 517                      | 676 | N/A                      | N/A |

- Choose wheel size**  
 We recommend choosing the largest possible wheel size and finding the position of the foot plate where the child has the best position for propelling the wheels. A lower position of the foot plate can be obtained by choosing a smaller wheel size.
- Choose camber angle**  
 The child's hip width plus 100mm should be less than measurement (A) in order to fit the accessories to the product ( $\text{hip width} + 100\text{mm} < A$ )  
 We recommend choosing the camber angle that is closest to the hip width plus 100mm in order to achieve the closest position for propelling the wheels.
- Consider your surroundings**  
 The total width of the product (C) will change with measurement (A)

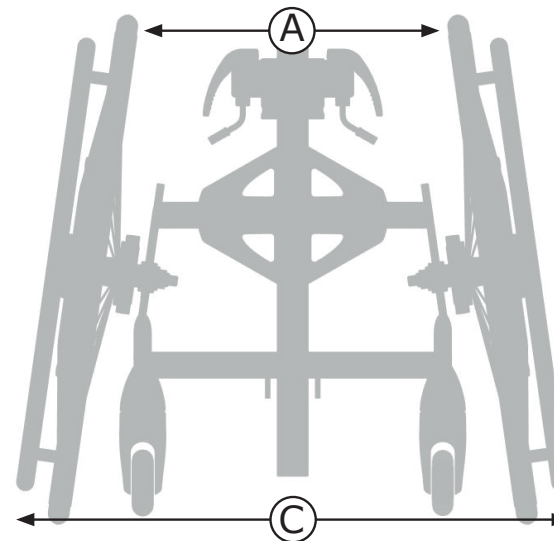




# Rabbit Up Camber kit placement guide

Refer to the user guide for instructions on how to change the camber angle of the driving wheels.

|                     |     | Y: +6° |     |        |     | Standard |    | Y: -3° |    | Y: -6° |     |
|---------------------|-----|--------|-----|--------|-----|----------|----|--------|----|--------|-----|
|                     |     | Y: +6° |     | Y: +3° |     | Y: 0°    |    | Y: -3° |    | Y: -6° |     |
| Size                | X   | Z (#)  | A   | Z (#)  | A   | Z (#)    | A  | Z (#)  | A  | Z (#)  | A   |
| 1                   | 22" | N/A    | 14° | N/A    | 11° | 1        | 8° | 1      | 5° | 2      | 2°  |
|                     | 24" | 3      |     | 4      |     | 5        |    | 6      |    | 7      |     |
|                     | 26" | 8      |     | 9      |     | 10       |    | 11     |    | 12     |     |
| 2                   | 26" | N/A    | 12° | N/A    | 9°  | 1        | 6° | 1      | 3° | 2      | 0°  |
|                     | 29" | 6      |     | 8      |     | 9        |    | 10     |    | 11     |     |
|                     | 32" | 13     |     | 15     |     | 16       |    | 17     |    | 18     |     |
| 3                   | 26" | N/A    | 12° | N/A    | 9°  | 1        | 6° | 1      | 3° | 2      | 0°  |
|                     | 29" | 6      |     | 8      |     | 9        |    | 10     |    | 11     |     |
|                     | 32" | 13     |     | 15     |     | 16       |    | 17     |    | 18     |     |
| Castors NO brakes   | 32" | 5      | 10° | 7      | 7°  | 8        | 4° | 8      | 1° | N/A    | N/A |
|                     | 36" | 14     |     | 16     |     | 17       |    | 18     |    |        |     |
| Castors WITH brakes | 32" | 8      | 10° | 9      | 7°  | 10       | 4° | 11     | 1° | N/A    | N/A |
|                     | 36" | 17     |     | 18     |     | 19       |    | 20     |    |        |     |

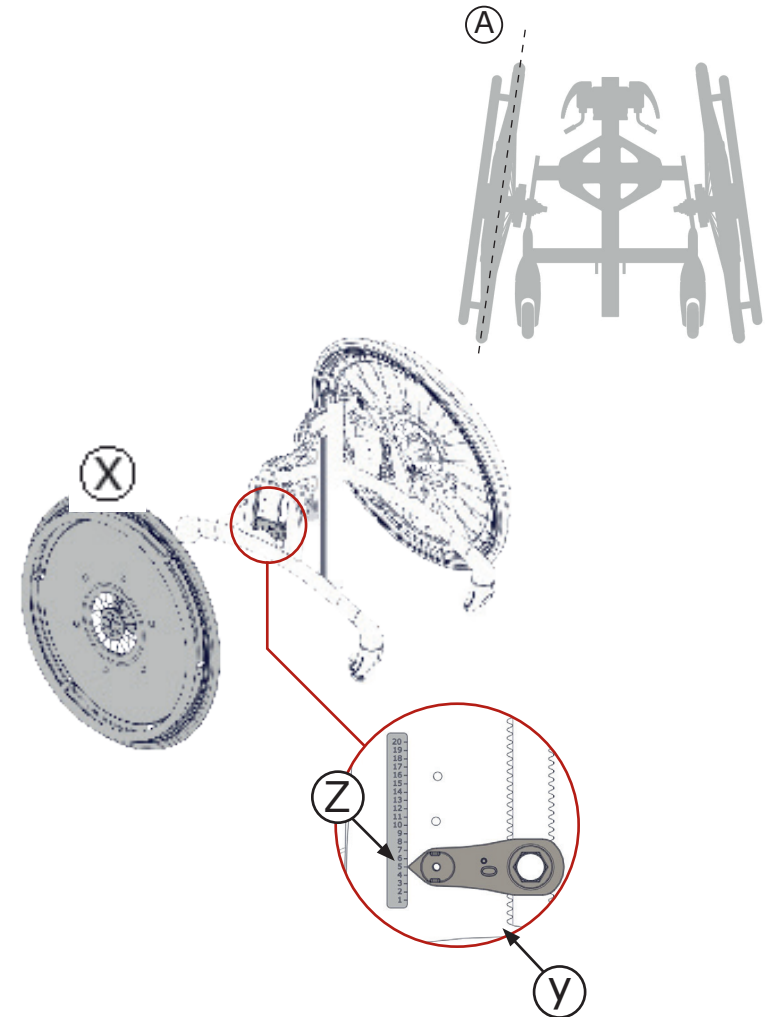



# Example on how to use these guides



## 1 Step 1 : Collect child's measurements

**Gustav:**  
Height: 1380mm  
Armpit height: 970mm  
Weight: 25kg  
Age: 7  
Hip width: 260mm

## 2 Step 2 : Choose size

Gustav is able to fit in a size 2 and a size 3 Rabbit Up. So which do you choose?

We would recommend to consider the growth ability that each size offers. Perhaps you are able to change your Rabbit Up in 1 year or maybe you need to consider the fact that you need the product to last 5 years.

We choose to put Gustav in a size 2 as he has the option to use both a size 2 and 3 Rabbit in his school.

## 3 Step 3 : Choose wheel size

We recommend choosing the largest possible wheel size and finding the position of the foot plate where the child has the best position for propelling the wheels.

## 4 Step 4 : Choose camber angle

Here measurement (A) should first be considered. To make sure that the child and accessories fit comfortably in the product we recommend adding 100mm to your child's hip width. ( $hip\ width + 100mm < A$ )

Measurement (A) is therefore:  $260 + 100 = 360$

Gustav is able to use camber:  $0^\circ$  (standard),  $-3^\circ$  and  $-6^\circ$ . We recommend choosing the camber angle that is closest to the hip width plus 100mm in order to achieve the closest position for propelling the wheels.

## 5 Step 5 : Consider your surroundings

You should then consider your surroundings. Measurement (A) and (C) are related (you can not change one without changing the other).

If you need to use the Rabbit Up in a smaller or narrow area then perhaps changing the camber angle to achieve the narrowest position is more important.

| Rabbit Up user measurements                   |               |                |                |                |
|---|---------------|----------------|----------------|----------------|
| Standard product (Stander and Mobile stander) | Size 1        | Size 2         | Size 3         | Size 4         |
| Approximate total height                      | 870 - 1000 mm | 1000 - 1390 mm | 1110 - 1490 mm | 1230 - 1800 mm |
| Max. armpit height                            | 740 mm        | 1080 mm        | 1190 mm        | 1420 mm        |
| Max. weight                                   | 40 kg (88 lb) | 50 kg (110 lb) | 60 kg (132 lb) | 70 kg (154 lb) |
| Approximate age                               | 1 - 3         | 4 - 10         | 5 - 12         | 7 - 18         |

| Size | Wheel size | Up-charge<br>Camber: +6° |     | Up-charge<br>Camber: +3° |     | Standard |     | Up-charge<br>Camber: -3° |     | Up-charge<br>Camber: -6° |     |
|------|------------|--------------------------|-----|--------------------------|-----|----------|-----|--------------------------|-----|--------------------------|-----|
|      |            | A                        | C   | A                        | C   | A        | C   | A                        | C   | A                        | C   |
| 1    | 22"        | N/A                      | N/A | N/A                      | N/A | 369      | 633 | 395                      | 610 | 423                      | 587 |
|      | 24"        | 299                      | 686 | 326                      | 659 | 356      | 635 | 384                      | 607 | 414                      | 582 |
|      | 26"        | 280                      | 691 | 310                      | 662 | 342      | 635 | 373                      | 604 | 406                      | 576 |
| 2    | 26"        | N/A                      | N/A | 394                      | 707 | 428      | 680 | 460                      | 651 | 493                      | 623 |
|      | 29"        | 337                      | 748 | 371                      | 713 | 409      | 682 | 444                      | 646 | 482                      | 614 |
|      | 32"        | 318                      | 754 | 355                      | 716 | 396      | 681 | 435                      | 642 | 476                      | 606 |
| 3    | 26"        | N/A                      | N/A | 444                      | 757 | 478      | 730 | 510                      | 701 | 543                      | 673 |
|      | 29"        | 387                      | 798 | 421                      | 763 | 459      | 732 | 494                      | 696 | 532                      | 664 |
|      | 32"        | 368                      | 804 | 405                      | 766 | 446      | 731 | 485                      | 792 | 526                      | 656 |
| 4    | 32"        | 406                      | 793 | 445                      | 755 | 486      | 719 | 525                      | 681 | N/A                      | N/A |
|      | 36"        | 384                      | 802 | 427                      | 759 | 473      | 719 | 517                      | 676 | N/A                      | N/A |